



Washroom partition system

NiUU one



Partition system NiUU one

30 mm and 38 mm thick MFC panels with flush front design



	NiUU one F	NiUU one K	NiUU one F Superfront
Core material	Particle board		
Finish	Melamine	Melamine	Laminate
Panel thickness (front)	30 mm (1 3/16")	38 mm (1 1/2")	30 mm (1 3/16")
Panel thickness (dividers)	30 mm (1 3/16")		
Max. overall height (without transom)	2800 mm (110")	2800 mm (110")	2800 mm (110")
Rebated doors	✗	✗	✗
Flush front design	✓	✓	✓

RECOMMENDED AREAS OF APPLICATION


- Museums
- Office buildings
- Administration buildings
- Hotels
- Restaurants



Available configurations


Standard configuration

Floor mounted with pedestals under front pilasters and overhead braced satin anodized aluminum headrail
Maximum overall height (top of headrail): 2300 mm (90") including 80-215 mm (3" to 8 1/2") floor clearance

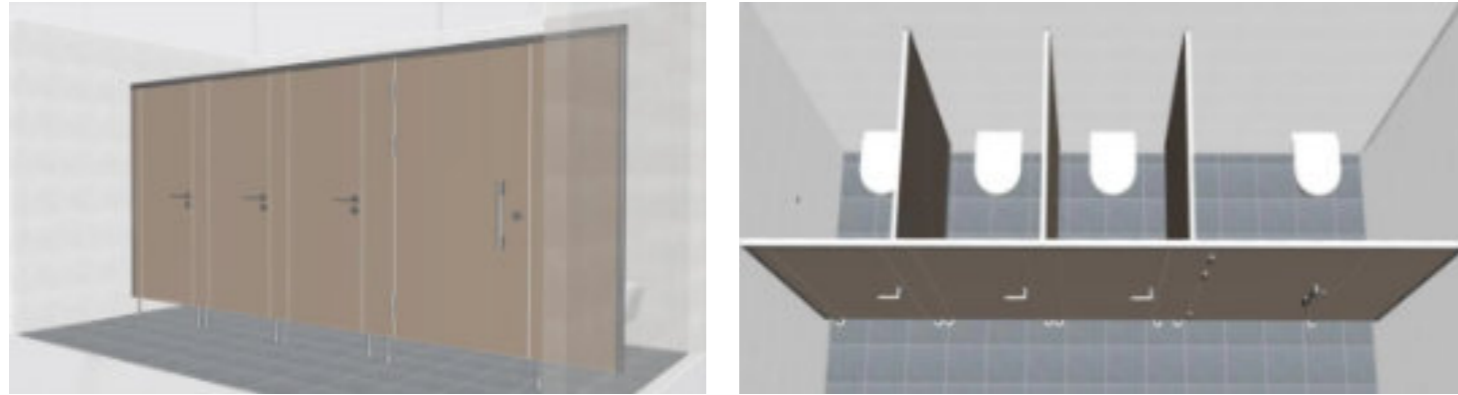

Floor-to-ceiling

Maximum overall height: 2800 mm (110") including 30 mm (1 3/16") floor clearance under the doors

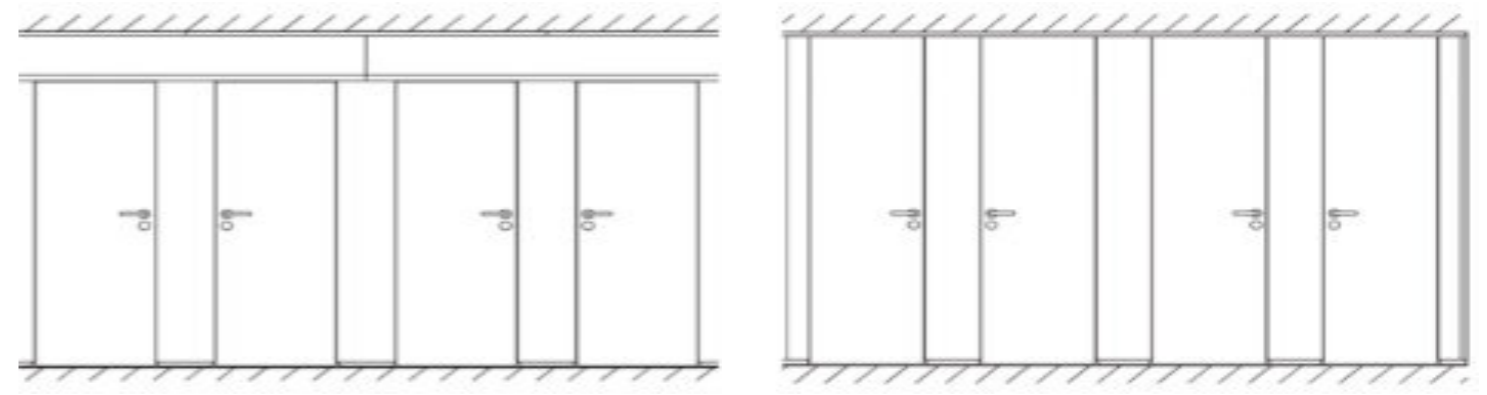


With continuous transom panel

Without transom panel

Floating effect (only recessed pedestals)


Floor mounted with recessed pedestals under partition walls and overhead braced satin anodized aluminum headrail
Maximum overall height (top of headrail): 2300 mm (90") including 80-215 mm (3" to 8 1/2") floor clearance

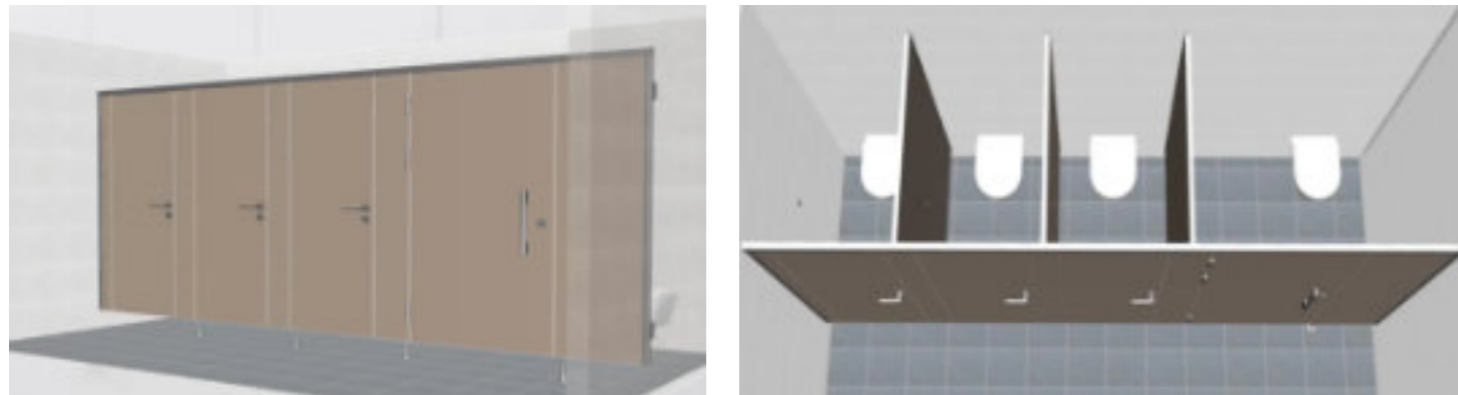

Other configurations possible under request and technical feasibility

Floating effect with recessed headrail

Floating-effect with recessed pedestals and recessed satin anodized aluminum headrail
Maximum overall height (top of panel): 2135 mm (84") including 80-180 mm (3" to 7") floor clearance

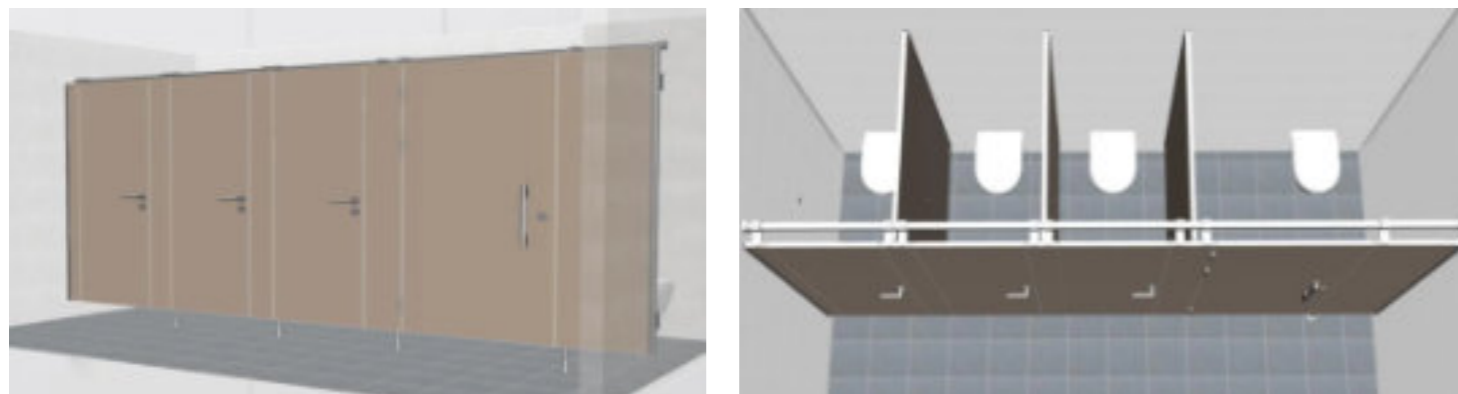

Floating configuration with **recessed pedestals and recessed headrail**, with wall connection via shadow gap

Special configuration: NiUU one F Superfront

30 mm resin-coated board panels faced with 0.8 mm HPL



The special configuration **NiUU one F Superfront** is:

- equipped with tougher surface panels made of 0.8 mm HPL
- extra resistant to knocks and surface scratches, and ideal for high traffic areas

Standard features



Wall connection via U-profile to allow for construction tolerances:

- Made of satin anodized aluminum and rounded for safety reasons (radius 2 mm)
- Torsion resistant, flush headrail 45/43 mm above the door

3-roller edge spring hinges:

- Made of aluminum (20 mm in diameter, length 145 mm) with a maintenance free stainless-steel center
- Hinges are non-detachable, fastened with six screws and come with a stainless-steel pin for self-closing doors



L-shaped door handle and turning lock:

- Made of aluminum with square emergency lock release, locking status visible inside and outside
- Double-latch lock with metal latch and metal whisper trap for silently closing door

Pedestals:

- Made of anodized aluminum (20 mm) with a stainless-steel foot plate, infinitely adjustable, firmly screwed onto the cubicle elements using a M12 thread
- The solid, corrosion-free aluminum covering rosette can be easily lifted for cleaning purposes



Optional features



Wall connections via **shadow gap** made of satin anodized aluminum



3-roller edge spring hinges made of **stainless steel**



Concealed hinges, not self closing (Available **only** for NiUU one K)



Pedestals made entirely of **stainless steel 304**



L-shaped door handle made of **stainless steel**



Door knob made of **aluminum**





Grip bar GS 40 with **LED-indicator**



Grip bar GS 25 - 800 mm

Other available door hardware:

- Nylon knobs
- Aluminum knobs
- Stainless steel knobs
- Nylon lever handle U-shaped
- Aluminum door handle U-shaped
- Stainless steel door handle L-shaped
- Stainless steel door handle U-shaped
- Aluminum Grip bar GS 25 - 400 mm
- Aluminum Grip bar GS 25 - 800 mm
- Aluminum Grip bar GS 40 - 430 mm
- Aluminum Grip bar GS 40 - 430 mm with LED-indicator
- Aluminum Grip bar GS 40 - 1165 mm
- Aluminum Grip bar GS 40 - 1165 mm with LED-indicator
- Aluminum Grip bar GS 40 - 1300 mm
- Aluminum Grip bar GS 40 - 1300 mm with LED-indicator
- Bespoke door hardware under request

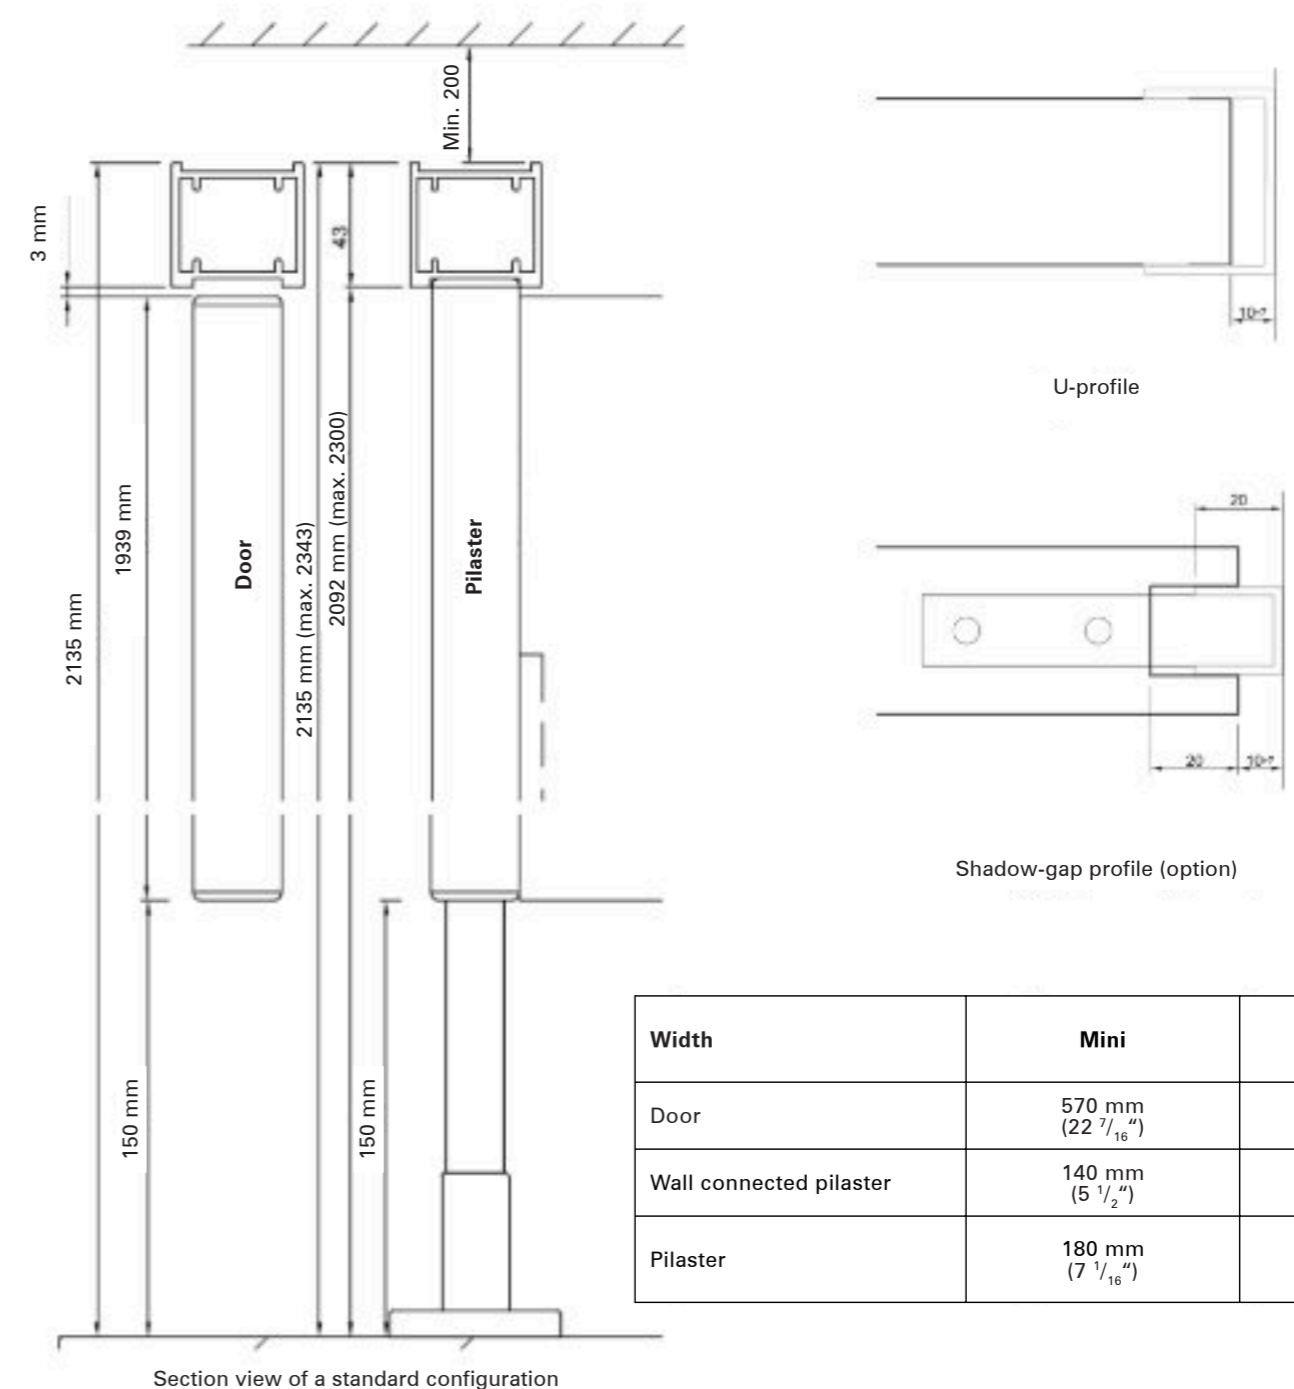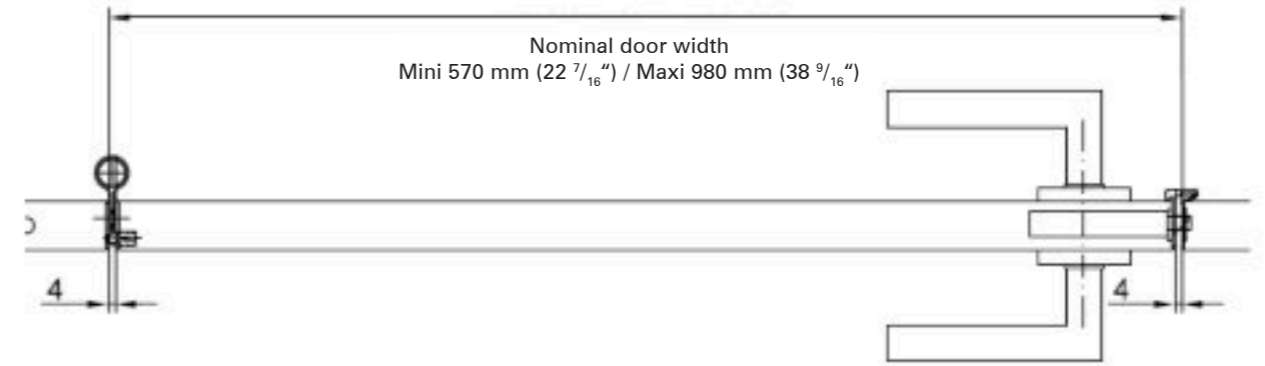

Width	Mini	Maxi
Door	570 mm (22 7/16")	980 mm (38 9/16")
Wall connected pilaster	140 mm (5 1/2")	1580 mm (62 3/16")
Pilaster	180 mm (7 1/16")	1580 mm (62 3/16")

Section view of a standard configuration

NiUU one Stock colour chart

Panels, doors and ABS edging



Traffic white **9317**



Granite white **9317P**



Light grey **7208**



Quartz grey **7708**



Graphite **7808**



Cappuccino **1117**



Corn yellow **1708**




Orange **2717**




Garnet red **3708**



Pacific blue **5715**



Lagoon blue **5408**




Silver **7408**




Lemon green **6715**



Black **0080**



Oak natural **0117**



Spruce rustic **0217**



¹With extra charge | ² Available in Superfront with extra charge

Please note that the represented colours may slightly differ from the original ones. Don't hesitate to ask for sample.



KEMMLIT-Bauelemente GmbH | Maltschachstraße 37 | D-72144 Dusslingen
Tel.: +49 (0) 7072 /1 31-0 | export@kemmlit.de | kemmlit-bauelemente.com